
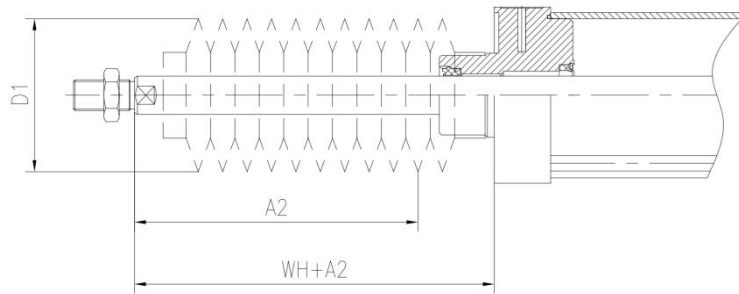


## FCZ系列防尘罩组件

主要技术参数		32	40	50	63	80	100
型号 FCZ-	技术特性						
	气缸行程范围[mm]	10 ... 500	10 ... 500	10 ... 500	10 ... 500	10 ... 500	10 ... 500
	材料/耐受温度	胶织布: -30℃~120℃ 增强尼龙布: -40℃~145℃ 高温帆布: -30℃~210℃ 矽胶涂面玻璃纤维布: -30℃~1100℃;					
	介质耐受性	灰尘, 碎屑, 油, 油脂, 燃油等					
	安装方式	通过抱箍					
	安装位置	活塞杆端					
	防护等级	IP54					
	耐腐蚀等级	3					



尺寸和型号

缸径Φ	32		40		50		63		80		100							
	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2						
10...50	29	38	55	28	46	56.7	28	57	63.6	28	57	63.9	25	93	70.4	25	93	74.3
51...125	47		73	43		71.7	46		81.6	46		81.9	37		82.4	37		86.3
126...175	61		87	56		84.7	56		91.6	56		91.9	49		94.4	49		98.3
176...250	80		106	72		100.7	73		108.6	73		108.9	62		107.4	62		111.3
251...300	96		122	86		114.7	86		121.6	86		121.9	74		119.4	74		123.3
301...350	112		138	100		128.7	97		132.6	97		132.9	86		131.4	86		135.3
351...375	114		140	101		129.7	105		140.6	105		140.9	87		132.4	87		136.3
376...425	130		156	115		143.7	116		151.6	116		151.9	98		143.4	98		147.3
426...475	145		171	130		158.7	126		161.6	126		161.9	110		155.4	110		159.3
476...500	147		173	131		159.7	134		169.6	134		169.9	111		156.4	111		160.3